

RICOH IM C2000 IM C2500



Take advantage of technology that scales and flexes as your business needs do. Be more productive and efficient with the RICOH IM C2000 / C2500 range of A3 colour devices.

Access a range of productivity features and upgrades - such as scanning directly to your email or dedicated folders on your network and ensure you have the latest security enhancements and mobile device connectivity options. Our intelligent devices are designed to do more as and when our business needs to, using technology that is scalable, secure, sustainable and simple.

Take advantage of:

- Print speeds of 20 25 ppm
- Easy-to-use 10.1" Smart Operation Panel with intuitive menu
- Mobile connectivity options including NFC, AirPrint® or Mopria®
- Increased uptime and performance with RICOH Intelligent
 Support






Get more from your Intelligent Devices

Stellar Performance

RICOH Intelligent Devices remain current and relevant no matter what your workplace requires. This way, you have ready and easy access to new functionality, when needed. Environmentally-friendly low TEC (Typical Electricity Consumption) values, deliver reduced energy consumption and cut running costs. While RICOH Intelligent Support features such as Predictive Maintenance* mean that device performance is monitored and any fixes resolved swiftly, minimising impact on your workplace.



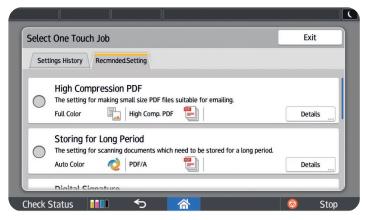


Work-flow Efficiency

You can tailor settings for individual users for quick access to apps which are used more often. The new small sized paper scanning units allow you to scan smaller documents much more conveniently, and the expanded paper tray capacity allows you to work more efficiently. Automatic firmware upgrades ensure that your devices are at maximum security so you can have peace of mind.

Smart Operation Panel

Our range of intelligent devices come fitted with a 10.1" Smart Operation Panel designed to enhance your productivity and mobility. Experience a user interface that offers fast and simple navigation with the ability to customise the layout to best suit your needs - even by adding your own company branding. Access device features, move between jobs and tasks quickly and conveniently enabling teams to work smarter.



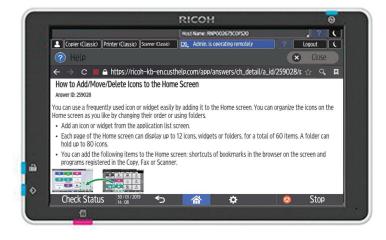

Ease of Use

Quick access to Web Help Tools via RICOH Intelligent Support help customers to complete simple tasks like toner replacement quickly and easily. Our consistent user interface across your Ricoh fleet provides an optimal and familiar experience everywhere and anywhere. Other than RICOH native applications in our intelligent devices, we have also collaborated with third party solutions to optimize your document management workflow.

RICOH IM C2000 / IM C2500

MAIN SPECIFICATIONS

MODEL RICOH IM C2500 RICOH IM C2500	25ppm	21 Sect 5.1 Sec 7.4 Sec 20ppm 2GB Std / 4 320GB Std / 4 32	GENERAL Warm-up Time First Output Speed : B/W First Output Speed : Full Color Continuous Output Speed Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Warm-up Time 21 Seconds First Output Speed : B/W 5.1 Seconds First Output Speed : Full Color 7.4 Seconds Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) 668 x 738 x 1030 mm Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Printer Resolution 1,200 x 1,200 dpi		5.1 Sec 7.4 Sec 20ppm 2GB Std / 4 320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	Warm-up Time First Output Speed : B/W First Output Speed : Full Color Continuous Output Speed Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
First Output Speed : B/W First Output Speed : Full Color Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max ARDF Capacity SPDF Capacity Veight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Klaximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Multiple Copying Multiple Copying Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Printer Resolution 1,200 x 1,200 dpi		5.1 Sec 7.4 Sec 20ppm 2GB Std / 4 320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	First Output Speed : B/W First Output Speed : Full Color Continuous Output Speed Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
First Output Speed : Full Color Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Multiple Copying Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi		7.4 Sec 20ppm 2GB Std / 4 320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	First Output Speed : Full Color Continuous Output Speed Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] 668 x 738 x 1030 mm (excluding ARDF/SPDF) 668 x 738 x 1030 mm (excluding ARDF/SPDF) 700 700 700 700 700 700 700 700 700 70		2GB Std / 4 320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	Continuous Output Speed Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi		2GB Std / 4 320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	Memory Std/Max HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
HDD Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	320GB St 100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	HDD Std/Max ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Multiple Copying Multiple Copying Com From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (from Adobe® Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	100 Sh 220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	ARDF Capacity SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Multiple Copying Wesolution Toom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	220 Sh Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	SPDF Capacity Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	Less Than 587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	Weight [Mainframe] Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	ılation)	587 x 685 x 668 x 738 x 220 - 240V Up to 999 600 c From 25% to 400	Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	ılation)	220 - 240V Up to 999 600 c From 25% to 400	Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Resolution	
Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	ulation)	220 - 240V Up to 999 600 c From 25% to 400	Power Source COPIER Multiple Copying Resolution	
COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	Up to 999 600 o From 25% to 400	COPIER Multiple Copying Resolution	
Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	600 c From 25% to 400	Multiple Copying Resolution	
Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)	600 c From 25% to 400	Resolution	
Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	- Ilation)	From 25% to 400		
PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)			
CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	lation)			
Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi		Intel Atom Processor ApolloLake 1.3GHz		
Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi	PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation)			
Print Resolution 1,200 x 1,200 dpi				
V · · · · · · · · · · · · · · · · · · ·	ect from Adobe®			
Network Interface : Standard Ethernet 10 base-T//100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B				
Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port)	·			
Mobile Printing Capability Apple AirPrint®, Mopria®, NFC, Ricoh Smart Device Connector			Mobile Printing Capability	
Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2012R2 Windows® Server 2016	er 2008R2, Windows® Server 2012R2,		Windows® environments	
Mac OS environments Macintosh OS X10.11 or Later		Macintosh OS X	Mac OS environments	
UNIX environments UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX	erprise, IBM® AIX	UNIX Sun® Solaris, HP-UX, SCO OpenServ	UNIX environments	
SAP® environments SAP® S/4®		SAP® 5	SAP® environments	
Other Supported environments IBM iSeries	IBM iSeries		Other Supported environments	
SCANNER			SCANNER	
Scanning Speed 120ipm (Simplex) / 240ipm (duplex)		120inm (Simpley) /	Scanning Speed	
Resolution : Maximum 1,200 dpi (via TWAIN)		120ipin (simplex) /	n total and t	
Compression Method TIFF (MH, MR, MMR, JBIG2), Grayscale			Resolution : Maximum	
File Formats Single Page TIFF, Single page JPEG, Single Page High compression PDF, Single page PDF-A, Multi page TIFF, Multi page PDF, Multi page High compression PDF, Multi Page PDF-A		1,200 dpi(
		1,200 dpi(TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co	Compression Method	
Scan Modes Email, Folder, USB, SD Card		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co	Compression Method File Formats	
Scan Modes Email, Folder, USB, SD Card FACSIMILE		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co	Compression Method File Formats Scan Modes	
		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U	Compression Method File Formats Scan Modes FACSIMILE	
FACSIMILE		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN,	Compression Method File Formats Scan Modes FACSIMILE Circuit	
FACSIMILE Circuit PSTN, PBX		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Seco	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Seco	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secondary 18 x 3.65 line/mm	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed : Maximum Resolution : Standard	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm, 16 x 15.4 line/mm	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages)		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages)		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Seconormal Seconorm	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed : Maximum Resolution : Standard Resolution : Option Compression Method Memory : Standard Memory : Maximum PAPER HANDLING	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secc. 33.6 k 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed : Maximum Resolution : Standard Resolution : Option Compression Method Memory : Standard Memory : Maximum PAPER HANDLING Recommended Paper Size	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secc. 33.6 k 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed : Maximum Resolution : Standard Resolution : Option Compression Method Memory : Standard Memory : Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 Si 2,300 Si	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Input Capacity Max	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secco 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 Si 2,300 Si	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed : Maximum Resolution : Standard Resolution : Option Compression Method Memory : Standard Memory : Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Output Capacity Std	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets		1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 Si 2,300 Si 500 Sh 1,625 Si	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Max	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets	Page PDF-A Preprinted paper, Bond paper,	1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 k 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 S 2,300 S 500 Sh 1,625 Si 60 - 300	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Max Paper Weight	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight 60 - 300g/m² Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper,	Page PDF-A Preprinted paper, Bond paper,	1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 k 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 S 2,300 S 500 Sh 1,625 Si 60 - 300	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Std Paper Output Capacity Max Paper Weight Paper Types	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed: Maximum 33.6 Kbps Resolution: Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight 60 - 300g/m² Plain paper, Recycle paper, Special paper, Color paper, Label paper, OHP	Page PDF-A Preprinted paper, Bond paper,	1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 Si 2,300 Si 500 Sh 1,625 Si 60 - 300 Plain paper, Recycle paper, Special paper, Color paper, I Coated paper, Envelope, Glo	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Std Paper Weight Paper Types ECOLOGY	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed 3 Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets Paper Output Capacity Max 1,625 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight 60 - 300g/m² Paper Types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Envelope, Gloss paper, Label paper, OHP	Page PDF-A Preprinted paper, Bond paper,	1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 K 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 Si 2,300 Si 500 Sh 1,625 Si 60 - 300 Plain paper, Recycle paper, Special paper, Color paper, L Coated paper, Envelope, Glo	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Std Paper Weight Paper Types ECOLOGY Power Consumption: Max	
FACSIMILE Circuit PSTN, PBX Transmission Speed 2 Seconds Modem Speed : Maximum 33.6 Kbps Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi Resolution : Option 16 x 15.4 line/mm, 400 x 400 dpi Compression Method MH, MR, MMR, BIIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets Paper Output Capacity Max 1,625 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight 60 - 300g/m² Paper Types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Envelope, Gloss paper, Label paper, OHP ECOLOGY Power Consumption : Max Less Than 1,700 W	Page PDF-A Preprinted paper, Bond paper,	1,200 dpi (TIFF (MH, MR, MMR Single Page TIFF, Single page JPEG, Single Page High co Multi page PDF, Multi page High co Email, Folder, U PSTN, 2 Secci 33.6 k 8 x 3.65 line/mm 16 x 15.4 line/mm MH, MR, M 4MB (320 60MB (4,80) SRA3, A3, A4, A5 1,200 S 2,300 S 500 Sh 1,625 Si 60 - 300 Plain paper, Recycle paper, Special paper, Color paper, L Coated paper, Envelope, Glo Less Than 46.2	Compression Method File Formats Scan Modes FACSIMILE Circuit Transmission Speed Modem Speed: Maximum Resolution: Standard Resolution: Option Compression Method Memory: Standard Memory: Maximum PAPER HANDLING Recommended Paper Size Paper Input Capacity Std Paper Input Capacity Std Paper Output Capacity Std Paper Output Capacity Max Paper Weight Paper Types ECOLOGY Power Consumption: Max Power Consumption: Ready	

RICOH IM C2000 / IM C2500

MAIN SPECIFICATIONS

MODEL	RICOH IM C2000	RICOH IM C2500		
INPUT / OUTPUT TRAY AND FINISHER OPTIONS				
1 x 550-Sheets Paper Tray (PB 3270)	Paper Size : A6-SRA3, Pa	per Weight : 60-300g/m²		
2 x 550-Sheets Paper Tray (PB 3300)	Paper Size : A6-SRA3, Pa	per Weight : 60-300g/m²		
1,000-Sheet Booklet Finisher (SR3270)	Paper Size : Proof Tray :A6-A3, Shift Tray : A6-A3, Booklet tray : A4-A3 Paper weight : 60-300g/m² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples, Booklet Staple capacity Max : 50 sheets (A4) 30 Sheets (A3)			
500-Sheet Internal Finisher (\$R3250)	Paper Size : A6-A3, Paper weight : 60-300g/m² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples Staple capacity Max : 50 sheets (A4) 30 Sheets (A3)			
250-Sheet Internal Finisher (\$R3300)	Paper Size : A6-A3, Paper weight : 60-300g/m² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top,1 Staple Staple capacity Max : 2-5 sheets (A4)			
Internal Shift Tray (SH3080)	Tray Capacity : 250 sheets, Paper size : 320 mm x 600 mm or smaller, Paper weight : 60-300g/m²			
One-bin tray (BN3130)	Tray Capacity : 125 sheets, Paper size : A5 - A3, Paper weight : 52-300g/m²			

OTHER OPTIONS

Platen Cover PN2000, DF3110, DF3120, Fax Option Type M37, G3 Interface Unit Type M37,Fax Connection unit Type M37,FAX Memory unit Type M19 64MB, Memory Unit Type M37 4GB, Caster Table Type M3, VM Card Type M37, Side Tray, Punch Unit NA/EU (PU3070,PU3080), Postscript3 Unit Type M37, XPS direct print Option Type M37, IEEE 1284 I/F Type M19, IEEE 802.11a/g/n I/F Type M19, Device server option Type M37, File format Converter Type M19, OCR Unit Type M13, Small Paper Feeding Unit Type M37, Page Keeper Type M37, ADF Handle, Optional Counter Interface Unit Type M12, NFC Card Reader Type M37, Smart Card Reader Built in Unit Type M37, Unicode Font Package for SAP®License.

* Requires @Remote Connection



www.ricoh.com.au

RICOH Australia Pty Ltd

Level 1, 2 Richardson Place, North Ryde, NSW 2113, 13 RICOH (13 74264)

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. Thé images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2021 Ricoh Asia Pacific Pte Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Asia Pacific Pte Ltd.



















